

AFCRC-TN-59-156

ASTIA DOCUMENT NO. AD 212464

INT. T. 1

25 Waverly Place, New York 3, N. Y.

NOV 1 1959



NEW YORK UNIVERSITY

Institute of Mathematical Sciences

Division of Electromagnetic Research

RESEARCH REPORT No. EM-128

Excitation and Propagation of Surface Waves

JOSEPH B. KELLER and FRANK C. KARAL, JR.

Contract No. AF19(604)1717

FEBRUARY, 1959

NEW YORK UNIVERSITY
Institute of Mathematical Sciences
Division of Electromagnetic Research

Research Report No. EM-128

EXCITATION AND PROPAGATION OF SURFACE WAVES

Joseph B. Keller and Frank C. Karal, Jr.

Joseph B. Keller

Joseph B. Keller

Frank C. Karal, Jr.

Frank C. Karal, Jr.

Sidney Borowitz

Sidney Borowitz
Acting Project Director

Dr. Werner W. Gerbes

Dr. Werner Gerbes
Contract Monitor

The research reported in this document has been sponsored by the Electronics Research Directorate of the Air Force Cambridge Research Center, Air Research and Development Command, and by a grant from the American Petroleum Institute. The publication of this report does not necessarily constitute approval by the Air Force of the findings or conclusions contained herein.

Contract No. AF 19(604)1717

February, 1959

Requests for additional copies by Agencies of the Department of Defense, their contractors, and other Government agencies should be directed to the:

ARMED SERVICES TECHNICAL INFORMATION AGENCY
DOCUMENTS SERVICE CENTER
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA

Department of Defense contractors must be established for ASTIA services or have their 'need-to-know' certified by the cognizant military agency of their project or contract.

All other persons and organizations should apply to the:

U. S. DEPARTMENT OF COMMERCE
OFFICE OF TECHNICAL SERVICES
WASHINGTON 25, D.C.

Abstract

A geometrical theory is developed for the analysis of surface wave excitation and propagation. The surfaces along which the surface waves propagate may be either curved or flat, and may have either constant or variable properties. The theory is based on the concept of a complex or imaginary ray. The excitation coefficient which enters the theory is determined from the solution of a canonical problem - that of a line source over an impedance plane. Then the theory is applied to the surface wave excited by a line source, on a wedge with variable surface impedance. The result agrees precisely with the asymptotic form of the exact solution. Another application is made to the surface wave excited on a cylinder by a line source. The result also agrees with the exact solution.

Table of Contents

	<u>Page</u>
1. Introduction	1
2. Complex rays	2
3. Amplitude and phase	3
4. The reciprocity principle	5
5. Determination of the coefficients	7
6. Surface wave on an impedance plane	10
7. Surface wave on a wedge with a non-uniform impedance	13
8. Surface wave on a cylinder	17
References	21
Distribution List	

1. Introduction

A surface wave is a wave which travels along a surface with its field confined to the neighborhood of the surface. It differs from other waves with this property in that it can exist by itself on a flat surface in a homogeneous medium. The evanescent waves produced by total reflection are also confined to the neighborhood of a surface, but they cannot exist without the incident field. On the other hand, the diffracted waves associated with the usual surface rays can exist by themselves on curved surfaces, but not on flat ones. A surface wave is characterized by a complex propagation constant $k_1 = \omega/c_1$, where ω is the angular frequency of the field and c_1 is the complex velocity. Either k_1 or c_1 determines the phase velocity and the attenuation rate of the wave along the surface. We shall assume that k_1 and c_1 are known and investigate the manner in which such waves are excited, how they propagate and the rate at which their field diminishes with distance from the surface. We shall do this by constructing a geometrical theory, analogous to geometrical optics and to the geometrical theory of diffraction [1], which will permit us to visualize the excitation process and to calculate the amplitude of the surface wave in rather general cases.

In the next three sections we formulate our theory. In the fifth and sixth sections we determine the excitation and radiation coefficients which enter the theory. This is done for scalar fields which satisfy the reduced wave equation and satisfy an impedance condition on the surface. The problem of designing the source to maximize the surface wave amplitude is also treated. Then the method is used to determine the surface wave which a line source excites on a wedge with variable surface impedance. The result is found to coincide with the high frequency asymptotic form of the exact solution of this problem. Finally the surface wave on a circular cylinder is determined by our method and also found to coincide with the asymptotic form of the exact solution.

2. Complex rays

Rays in space can be defined in terms of the propagation velocity $c(\vec{x})$ by Fermat's principle or by the differential equations which follow from it. Complex rays can be defined by applying Fermat's principle to complex curves, or by considering complex solutions of the ray equations. In either case it is necessary that $c(\vec{x})$ be defined for complex values of \vec{x} , which is the case if $c(\vec{x})$ is an analytic function of \vec{x} . We can also define complex surface rays by applying Fermat's principle to complex curves on the surface S or by considering complex solutions of the equations for surface rays. In this case it is necessary that both the velocity $c_1(\vec{x})$ and the surface S be defined for complex \vec{x} .

Next, by means of Fermat's principle, we may define a ray joining two points Q and P in space and having an arc on S . It follows from Fermat's principle that such a ray consists of a complex space ray from Q to some point Q_1 on S , a complex surface ray from Q_1 to another point P_1 on S , and a complex space ray from P_1 to P . In addition it follows that at both Q_1 and P_1 the unit tangents I and T to the space and surface rays respectively must satisfy the condition

$$(1) \quad c^{-1}I + c_1^{-1}T = (c^{-1}I \cdot N + c_1^{-1}T \cdot N)N.$$

Here N denotes the unit normal to S at Q_1 or P_1 . The vectors are oriented such that $-I$ and T both point in the direction of increasing arclength along the ray. See Figure 1. Equation (1) is equivalent to the geometrical conditions that I

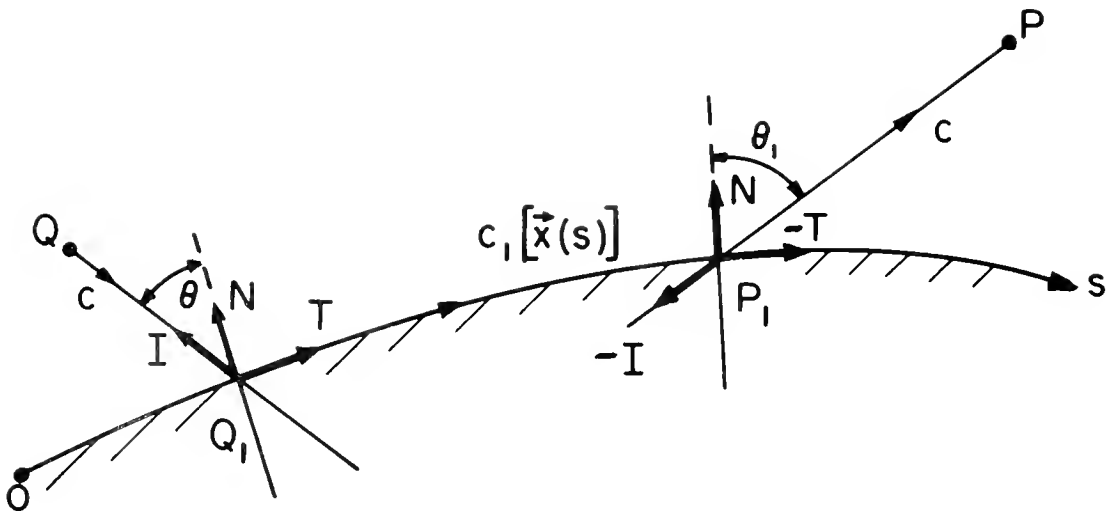


FIGURE 1

The complex ray from Q reaches the surface at the complex point Q_1 where it produces a complex surface ray. This ray travels along the surface with the velocity c_1 and sheds complex space rays. The ray which leaves the surface at P_1 passes through P . The angles θ and θ_1 are determined by Snell's law (1).

and T be coplanar with N and lie on opposite sides of N, and that the angle Θ between I and N satisfy Snell's law

$$(2) \quad \sin \Theta = \frac{c}{c_1} .$$

The preceding considerations enable us to determine all the ray paths which contain arcs on S along which surface wave propagation occurs.

3. Amplitude and phase

The field on any ray is composed of a phase and an amplitude. On a surface ray from Q_1 to P_1 the complex phase change $\phi(Q_1, P_1)$ is the following integral with respect to arc length s

$$(3) \quad \phi(Q_1, P_1) = \omega \int_{Q_1}^{P_1} \frac{ds}{c_1[\vec{x}(s)]} = \int_{Q_1}^{P_1} k_1[\vec{x}(s)] ds .$$

On a space ray

$$(4) \quad \phi(P_1, P) = \omega \int_{P_1}^P \frac{ds}{c[\vec{x}(s)]} = \int_{P_1}^P k[\vec{x}(s)] ds .$$

The amplitude variation along any ray depends upon the family of rays in which the ray under consideration is continued. For a complex ray the amplitudes $A_1(Q_1)$ and $A_1(P_1)$, which are vectors for vector fields, are related by

$$(5) \quad A_1(P_1) = A_1(Q_1) \left[\frac{d\sigma(Q_1)c_1(P_1)}{d\sigma(P_1)c_1(Q_1)} \right]^{1/2} .$$

In (5) $d\sigma(Q_1)/d\sigma(P_1)$ denotes the ratio of the width at Q_1 to that at P_1 of an infinitesimal band of complex surface containing the ray from Q_1 to P_1 . The analogue of (5) for the space ray from P_1 to P is

$$(6) \quad A(P) = A(P_1) \left[\frac{d\tau(P_1)c(P)}{d\tau(P)c(P_1)} \right]^{1/2}.$$

In (6) $d\tau(P_1)/d\tau(P)$ is the ratio of the cross sectional area at P_1 to that at P of an infinitesimal tube of complex rays containing the ray from P_1 to P . A similar relation holds on any space ray.

The amplitude on the surface ray at Q_1 is proportional to that on the space ray at Q_1 so we have

$$(7) \quad A_1(Q_1) = E(Q_1)A(Q_1).$$

The proportionality factor $E(Q_1)$ in (7) is an excitation coefficient. In the case of vector fields, it is a matrix. Similarly, the amplitude on the space ray at P_1 is proportional to that on the surface ray there so we have

$$(8) \quad A(P_1) = R(P_1)A_1(P_1).$$

The proportionality factor or matrix, $R(P_1)$ in (8) is a radiation coefficient. Upon combining the above results, we find that the field $u(P)$ at P is given by

$$(9) \quad u(P) = R(P_1)E(Q_1)A(Q_1) \left[\frac{d\sigma(Q_1)c_1(P_1)d\tau(P_1)c(P)}{d\sigma(P_1)c_1(Q_1)d\tau(P)c(P_1)} \right]^{1/2} e^{i[\phi(Q_1)+\phi_1(Q_1,P_1)+\phi(P_1,P)]}.$$

Equation (9) expresses the field at P on a ray which has traveled along an arc of S as a complex surface ray associated with surface wave propagation.

It involves the incident field $A(Q_1)e^{i\phi(Q_1)}$, various geometrical quantities, and the excitation and radiation coefficients.

We shall now restrict our considerations to the two dimensional case. In addition we shall assume that c is constant so that the space rays are straight lines. Due to the two dimensionality, the ratio $d\sigma(Q_1)/d\sigma(P_1) = 1$. Because the rays are straight we have $\phi(P_1, P) = kd(P_1, P)$ where $d(P_1, P)$ is the complex distance from P_1 to P . In addition we find that

$$(10) \quad \frac{d\tau(P_1)}{d\tau(P)} = \left[1 + (\mathcal{K} + \dot{\theta})d(P_1, P)\sec\theta \right]_{P_1}^{-1}.$$

In (10) $\mathcal{K}(P_1)$ denotes the curvature of S at P_1 , $\theta(P_1)$ is the solution of (2) at P_1 , and $\dot{\theta}$ is the derivative of θ with respect to arclength along the ray on S , evaluated at P_1 . With these simplifications, (9) becomes

$$(11) \quad u(P) = R(P_1)E(Q_1)A(Q_1) \left[\frac{c_1(P_1)}{c_1(Q_1)} \right]^{1/2} \left[1 + (\mathcal{K} + \dot{\theta})d(P_1, P)\sec\theta \right]_{P_1}^{-1/2} e^{i[\phi(Q_1) + \phi_1(Q_1, P_1) + kd(P_1, P)]}.$$

4. The reciprocity principle

To determine the coefficients $R(P_1)$ and $E(Q_1)$ we will now apply (11) to the case in which the field is produced by an isotropic line source, represented by the point Q in two dimensions. Then the incident field is given by

$$(12) \quad A(Q_1)e^{i\phi(Q_1)} = A_0 [d(Q, Q_1)]^{-1/2} e^{ikd(Q, Q_1)}.$$

In (12) A_0 is a constant characteristic of the source, with the dimensions of (length)^{1/2} times those of u . When use is made of (12), (11) becomes

$$(13) \quad u(P) = R(P_1)E(Q_1)A_0[d(Q, Q_1)]^{-1/2} \left[1 + (\kappa + \dot{\theta})d(P_1, P)\sec\theta \right]_{P_1}^{-1/2}$$

$$\left[\frac{c_1(P_1)}{c_1(Q_1)} \right]^{1/2} e^{i[kd(Q, Q_1) + \phi(Q_1, P_1) + kd(P_1, P)]}.$$

We now make use of the reciprocity principle which requires that a source at P must produce at Q the same field as an equal source at Q would produce at P. This implies that the right side of (13) must be unchanged when P is interchanged with Q and P_1 with Q_1 . From this constancy we obtain the condition

$$(14) \quad R(P_1)E(Q_1)[d(Q, Q_1)]^{-1/2} \left[1 + (\kappa + \dot{\theta})d(P_1, P)\sec\theta \right]_{P_1}^{-1/2} \left[\frac{c_1(P_1)}{c_1(Q_1)} \right]^{1/2} \\ = R(Q_1)E(P_1)[d(P, P_1)]^{-1/2} \left[1 + (\kappa + \dot{\theta})d(Q_1, Q)\sec\theta \right]_{Q_1}^{-1/2} \left[\frac{c_1(Q_1)}{c_1(P_1)} \right]^{1/2}$$

Equation (14) enables us to express the excitation coefficient E in terms of the radiation coefficient R by the relation

$$(15) \quad E(Q_1) = a^2 R(Q_1) \left[\kappa_1 + (\kappa + \dot{\theta})\sec\theta \right]_{Q_1}^{-1/2} c_1(Q_1).$$

Here a^2 is a constant with dimensions (time) \times (length) $^{-3/2}$. From (15) we see that $E(Q_1)$ depends upon $\kappa_1 = 1/d(Q, Q_1)$, the curvature of the incident wavefront at Q_1 , in addition to properties of the surface at Q_1 . It will be convenient to introduce $R'(Q_1) = a[c_1(Q_1)]^{1/2}R(Q_1)$ in order to avoid carrying along the factor a .

If we now use (15) to eliminate $E(Q_1)$ from (13), we obtain

$$(16) \quad u(P) = R'(P_1)R'(Q_1)A_0 \left[1 + (\kappa + \theta)d(Q_1, Q)\sec\theta \right]_{Q_1}^{-1/2} \left[1 + (\kappa + \theta)d(P_1, P)\sec\theta \right]_{P_1}^{-1/2} \\ \propto e^{i[kd(Q, Q_1) + \theta(Q_1, P_1) + kd(P_1, P)]}.$$

This expression for $u(P)$ applies in the two dimensional case when c is constant and the field is produced by a line source at Q . For a more general incident field we must use (15) in (11).

If the surface S is a plane and if c_1 is constant then ρ is infinite, θ is zero, $R'(P_1) = R'(Q_1) = R'$, $\theta(Q_1, P_1) = k_1 d(Q_1, P_1)$ and (16) becomes

$$(17) \quad u(P) = R'^2 A_0 e^{i[kd(Q, Q_1) + k_1 d(Q_1, P_1) + kd(P_1, P)]}.$$

5. Determination of the coefficients

To complete the prescription for calculating the field, we must determine the radiation coefficient R' . Since R is dimensionless, R' has the dimensions of $(\text{length})^{-1/4}$. Therefore it will be more convenient to consider the dimensionless product $k^{-1/4}R'(P_1)$. This product must depend upon the type of field under consideration. We shall assume that it depends upon $\theta(P_1)$ and possibly upon other physical constants of the medium and the surface at P_1 , but not upon any geometrical properties of the surface at P_1 . Therefore it can be found by considering the special problem of a line source in the presence of a uniform plane surface in a homogeneous medium. By comparing the exact solution of such a problem with (17), after expanding the exact solution for large ω (or large k and k_1), R' can be determined. In order to facilitate such a comparison, we will

now calculate the distances which appear in (17) in terms of the coordinates of P and Q.

Let us assume that the surface occupies the plane $y = 0$, that the source Q is located at $(0, y_0)$, and that the point P is at (x, y) with $x > 0$. The ray from Q to Q_1 is a straight line which makes with the y-axis the angle θ , determined by (2). Similarly the ray from P_1 to P is a straight line making the same angle with the y-axis. Therefore the coordinates of Q_1 are $(y_0 \tan \theta, 0)$ and those of P_1 are $(x - y \tan \theta, 0)$. See Figure 2. Then we find that $d(Q, Q_1) = y_0 \sec \theta$, $d(P_1 P) = y \sec \theta$ and $d(Q_1, P_1) = x - (y_0 + y) \tan \theta$. When these distances are inserted into (17), it becomes

$$(18) \quad u(x, y) = R'^2 A_0 e^{ik \left[|x| \sin \theta + (y_0 + y) \cos \theta \right]} .$$

Here x has been replaced by $|x|$ in order that this result remain valid for $x < 0$. In obtaining (18) from (17) we used the relation $k/k_1 = \sin \theta$, which follows from (2).

In the next section we shall obtain an exact solution of the problem just treated for a scalar field which satisfies the reduced wave equation

$$(19) \quad (\nabla^2 + k^2)u = \delta(x)\delta(y - y_0) , \quad y > 0 .$$

On the plane $y = 0$, u will satisfy the impedance boundary condition

$$(20) \quad u_y = -ikZu .$$

In (20) the complex constant Z is the surface impedance. In order for the surface to support a surface wave, it is necessary that Z satisfy the conditions

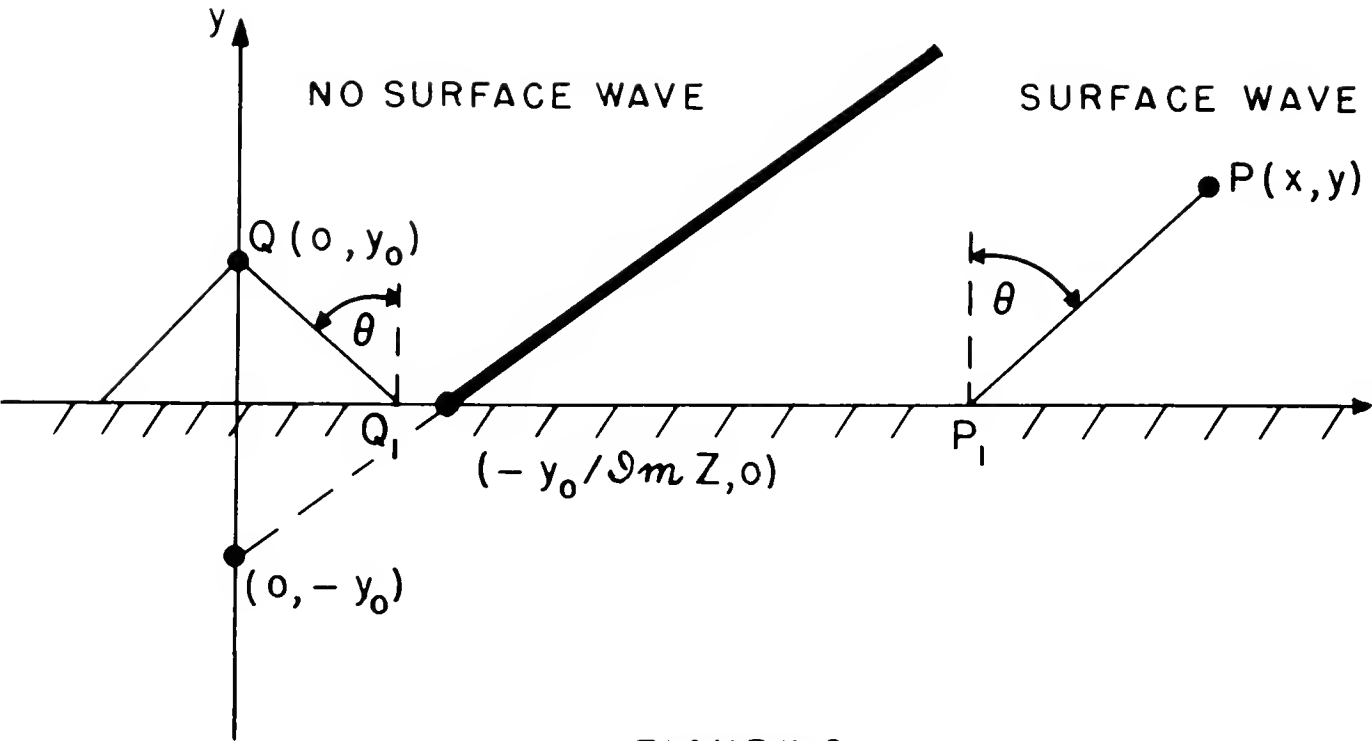


FIGURE 2

The surface wave produced by a line source at Q above a plane of surface impedance Z . The figure shows a ray from Q which makes the complex angle θ with the normal to the plane. The angle θ is determined by equation (22). This ray gives rise to a complex surface ray which sheds complex space rays. One such ray is shown leaving the surface at P_1 and passing through P . These rays cover the region to the right of the real line $(y + y_0)x^{-1} = -\text{Im}Z$ provided $\text{Re} Z = 0$. The figure is symmetric about the y axis.

$$(21) \quad \operatorname{Re} Z \geq 0, \quad \operatorname{Im} Z < 0.$$

If (18) is inserted into (20) it yields

$$(22) \quad \cos \theta = -Z.$$

From (22) and (2) the propagation c_1 is determined by the surface impedance through the relation

$$(23) \quad c_1 = c(1-Z^2)^{-1/2}.$$

When the outgoing solution of (19) and (20) is expanded asymptotically for large values of k , it contains a surface wave of the form (18) with θ given by (22). This surface wave becomes identical with (18) if in (18) we set

$$(24) \quad A_0 = (8\pi k)^{-1/2} e^{-i\pi/2}$$

$$(25) \quad R' = (8\pi k)^{1/4} e^{i\pi/4} (\cot \theta)^{1/2}.$$

This equation determines the radiation coefficient.

Let us now insert (24) and (25) into (16). This yields the final result for the surface wave excited on an impedance surface by an isotropic line source of amplitude A_0 in a homogeneous medium. It is

$$(26) \quad u(P) = \left[\tan \theta + (\kappa + \dot{\theta}) d(Q_1, Q) \sec \theta \tan \theta \right]_{Q_1}^{-1/2} \left[\tan \theta + (\kappa + \dot{\theta}) d(P_1, P) \sec \theta \tan \theta \right]_{P_1}^{-1/2} \\ \propto e^{i[kd(Q_1, Q_1) + \phi(Q_1, P_1) + kd(P_1, P)]}$$

If the line source is not isotropic we may write its amplitude as $A_0 f(\theta)$. Then the right side of (26) must be multiplied by $f(\theta)$. Here $f(\theta)$ represents the radiation pattern of the source. It is proportional to the amplitude on a ray which makes the angle θ with the normal to the surface S . Usually the pattern is expressed as a function $F(\Psi)$ of the angle Ψ which the ray makes with a fixed direction. By determining Ψ as a function of θ from the shape of S and the location of Q , we then have $f(\theta) = F[\Psi(\theta)]$. To maximize the amplitude of the surface wave it is necessary to maximize the pattern $f(\theta)$ in the complex direction θ of the ray which excites the surface wave. This direction is determined by (2) or (22). If S is a plane and if Ψ is measured from the line through Q normal to S , then $\Psi = \theta$ and therefore $f(\theta) = F(\theta)$.

If the incident field is arbitrary, the surface wave is given by (11), (15) and (25). Upon combining these equations we obtain

$$(27) \quad u(P) = (8\pi k)^{1/2} u_i(Q_1) \left[\kappa_i \tan \theta + (\kappa + \frac{1}{2}) \sec \theta \tan \theta \right]_{Q_1}^{-1/2} \left[\tan \theta + (\kappa + \frac{1}{2}) d(P_1, P) \sec \theta \tan \theta \right]_{P_1}^{-1/2} \\ \times e^{i \left[\pi/2 + \phi_1(Q_1, P_1) + kd(P_1, P) \right]} .$$

Here $u_i(Q) = A(Q) e^{i\phi(Q)}$ denotes the incident field at Q_1 .

6. Surface wave on an impedance plane

We shall now solve the boundary value problem (19) and (20), also requiring u to satisfy the radiation condition. The solution is

$$(28) \quad u(x, y) = -\frac{i}{4} H_0^{(1)}(kr) + \frac{i}{4\pi} \int_0^{\pi} \frac{\sin \phi - Z}{\sin \phi + Z} e^{ik[x \cos \phi + (y+y_0) \sin \phi]} d\phi .$$

In (28) r denotes the distance from $(0, y_0)$ and C is a contour in the complex plane. It runs from $\pi - i\infty$ to π along the line $\text{Re}\phi = \pi$, then from π to 0 along the line $\text{Im}\phi = 0$ and finally from 0 to $i\infty$ along $\text{Re}\phi = 0$. See Figure 3.

To obtain the asymptotic form of u for large k , we can first use the asymptotic form of $H_0^{(1)}(kr)$ for large values of the argument. This yields the asymptotic form of the incident field. The asymptotic form of the reflected field is obtained by performing a saddle point evaluation of the integral in (28). The saddle point ϕ_0 which lies in the interval $0 < \phi_0 < \pi$ is given by

$$(29) \quad \phi_0 = \tan^{-1} \frac{(y+y_0)}{|x|} .$$

The appropriate contour through the saddle point is obtained by setting the imaginary part of the phase $x\cos\phi + (y+y_0)\sin\phi$ equal to its value at $\phi = \phi_0$. If we let $\phi = \alpha + i\beta$, we find in this way two possible contours

$$(30) \quad \alpha = \phi_0 \pm \cos^{-1}(\text{sech}\beta) .$$

In order that the exponential in the integrand of (28) vanish at infinity on the contour, we must choose

$$(31) \quad \alpha = \phi_0 + \cos^{-1}(\text{sech}\beta) \quad \beta < 0$$

$$(32) \quad \alpha = \phi_0 - \cos^{-1}(\text{sech}\beta) \quad \beta > 0$$

With this choice of signs, the contour C can be deformed into the saddle contour. See Figure 3. Then the saddle point evaluation of the integral yields the asymptotic form of the reflected field.

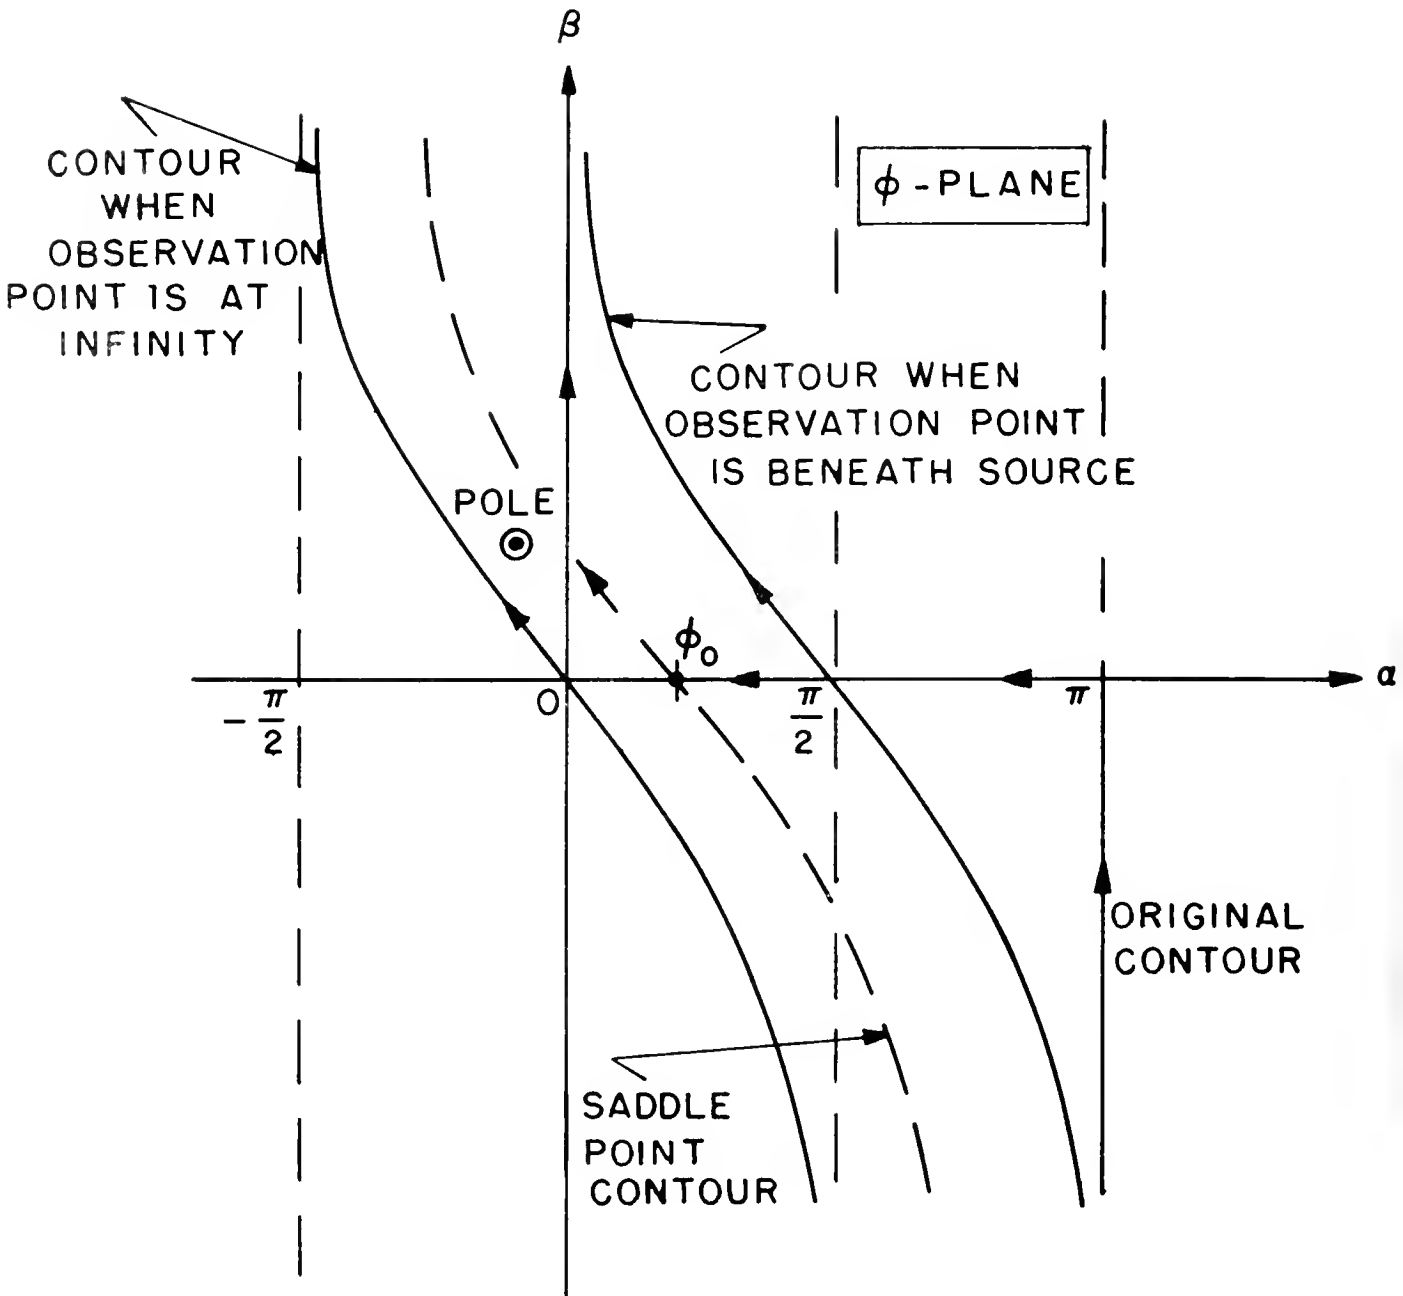


FIGURE 3

Saddle point contour used in the asymptotic evaluation of the reflected field for a line source above a plane with a constant surface impedance.

In the process of deforming C into the saddle contour it may cross the pole of the integrand which is at ϕ_1 given by

$$(33) \quad \sin \phi_1 = -Z \quad .$$

If this occurs, the residue of the integral at this pole must be added to the saddle point contribution to u. The residue is just the surface wave. It is easily found to be given by

$$(34) \quad u = \frac{Z}{\sqrt{1-Z^2}} e^{ik \left[|x| \sqrt{1-Z^2} - (y+y_0)Z \right]} \quad .$$

We have already stated that this coincides with (18) when A_0 and R' are given by (24) and (25), and θ by (22).

To determine when the surface wave (34) is present, let us consider the saddle contour which passes through the pole. Let ϕ^* denote the value of ϕ_0 for this contour. Because Z satisfies (21), the pole lies in the upper half plane $\beta > 0$. Thus (32) yields for ϕ^* the result

$$(35) \quad \phi^* = \alpha_1 + \cos^{-1}(\operatorname{sech} \beta_1) \quad .$$

If $\phi_0 < \phi^*$, the pole is crossed and the surface wave occurs, if $\phi_0 > \phi^*$ it does not occur. From (29) we thus find that the surface wave occurs if and only if the following condition is satisfied

$$(36) \quad \frac{y+y_0}{|x|} < \tan \left[\alpha_1 + \cos^{-1}(\operatorname{sech} \beta_1) \right] \quad .$$

In (36) α_1 and β_1 are the real and imaginary parts of ϕ_1 , the solution of (33). In the special case in which $\operatorname{Re} Z = 0$, (33) shows that $\alpha_1 = 0$. Then $\beta = -\sinh^{-1}(\operatorname{Im} Z)$ and (36) becomes

$$(37) \quad \frac{y+y_0}{|x|} < -\operatorname{Im} Z \quad .$$

See Figure 2.

7. Surface wave on a wedge with a non-uniform impedance

Let us now apply our method to determine the surface wave which a line source excites on a wedge with a non-uniform surface impedance. If the line source is parallel to the edge of the wedge, this problem is two dimensional. Then the point Q at which the source is located can be described by its polar coordinates (ρ', ϕ') and any other point P by (ρ, ϕ) . The origin is at the tip of the wedge, the surfaces of which are at $\phi = 0$ and $\phi = \alpha$. See Figure 4. If the incident wave has the amplitude (24) then the surface wave which it produces on either surface of the wedge is given by (26). To determine this wave excited on $\phi = 0$ we assume that Z, the surface impedance of the wedge on $\phi = 0$, is proportional to ρ^{-1} . Thus

$$(38) \quad Z = Z_0 \rho^{-1}$$

Here Z_0 is a constant which satisfies (21). Then from (23)

$$(39) \quad c_1 = \rho c (\rho^2 - Z_0^2)^{-1/2}.$$

To write (26) more explicitly we must evaluate the various geometrical quantities which appear in it. We shall first give them when P is to the right of Q, so that $\rho \cos \phi > \rho' \cos \phi'$. Then

$$(40) \quad d(Q, Q_1) = \rho' \sin \phi' \sec \theta$$

$$(41) \quad d(P, P_1) = \rho \sin \phi \sec \theta$$

$$(42) \quad \rho(Q_1) = \rho' \cos \phi' + \rho' \sin \phi' \tan \theta = \rho' \sec \theta \cos(\phi' - \theta)$$

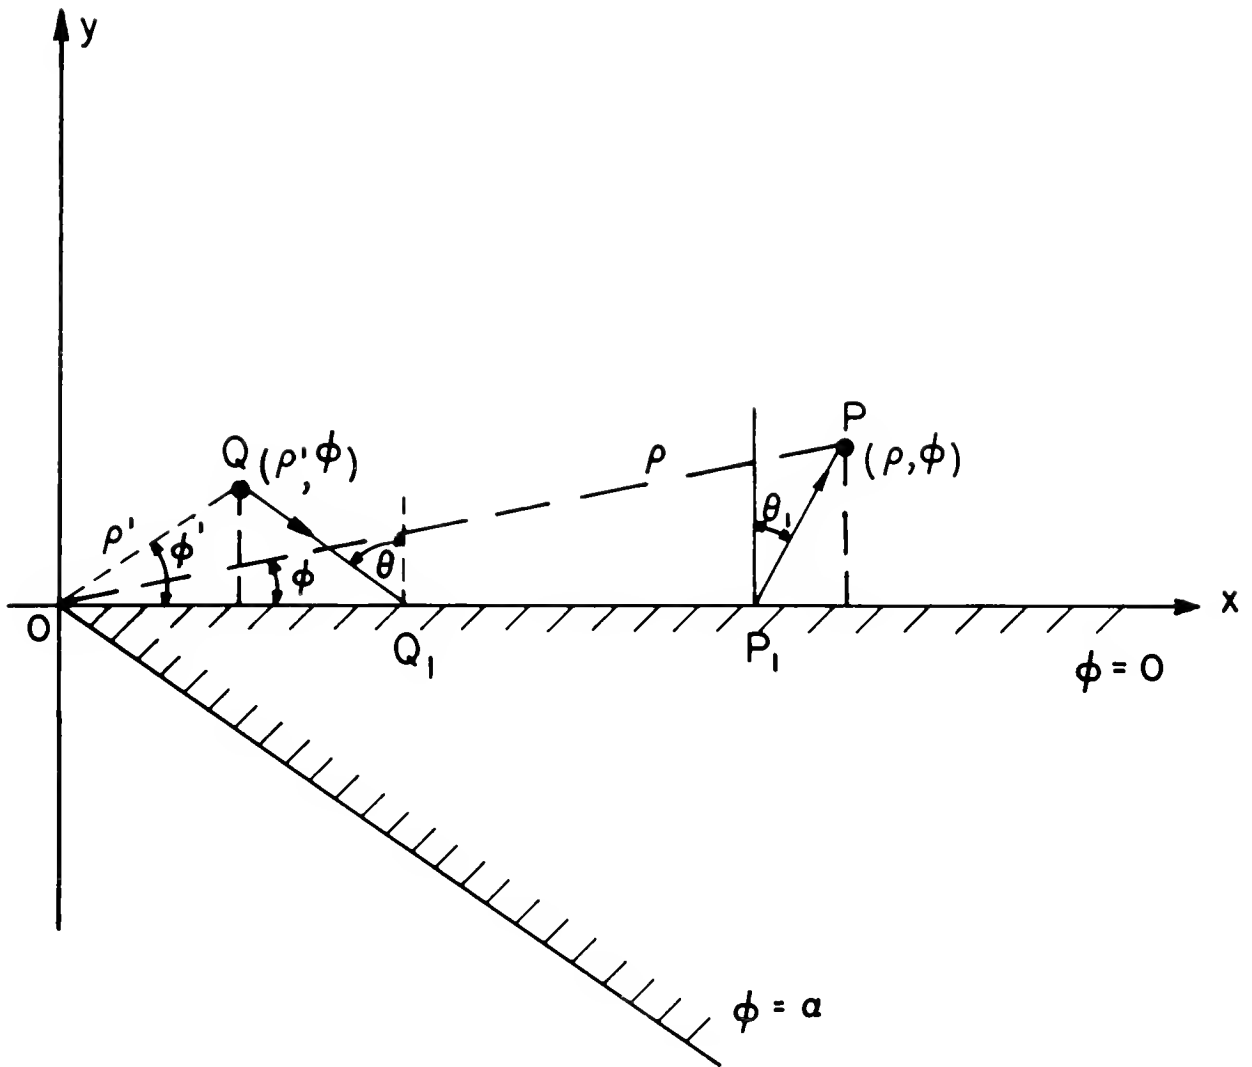


FIGURE 4

Excitation of a surface wave on a wedge by a line source at Q . The coordinates of Q are (ρ', ϕ') . A complex ray from Q excites a surface ray at the complex point Q_1 . This ray travels along the surface shedding complex space rays. The ray shed at P_1 passes through P which has coordinates (ρ, ϕ) . The wedge faces are at $\phi = 0$ and $\phi = \alpha$. The complex angles θ and θ_1 are determined by equation (22) in which Z is given by equation (38).

$$(43) \quad \rho(P_1) = \rho \cos \phi - \rho \sin \phi \tan \theta = \rho \sec \theta \cos(\phi + \theta).$$

From (22) and (38) we have

$$(44) \quad \rho(Q_1) = -Z_0 \sec \theta'$$

$$(45) \quad \rho(P_1) = -Z_0 \sec \theta.$$

Now from (42) and (44) we determine θ' , and from (43) and (45) we find θ .

$$(46) \quad \theta' = \phi' + \cos^{-1}(-Z_0/\rho')$$

$$(47) \quad \theta = -\phi + \cos^{-1}(-Z_0/\rho).$$

From (3) and (39) we obtain

$$(48) \quad \begin{aligned} \phi_1(Q_1, P_1) &= k \int_{\rho(Q_1)}^{\rho(P_1)} \rho^{-1} (\rho^2 - Z_0^2)^{1/2} d\rho \\ &= k \left[\rho \cos(\phi + \theta) \tan \theta - \rho' \cos(\phi' - \theta') \tan \theta' + Z_0(\theta' - \theta) \right]. \end{aligned}$$

Upon combining (40), (41) and (48) and simplifying, we obtain for the phase in (26)

$$(49) \quad \begin{aligned} &k d(Q, Q_1) + \phi_1(Q_1, P_1) + k d(P_1, P) \\ &= k \left[\rho (1 - Z_0^2 \rho^{-2})^{1/2} - \rho' (1 - Z_0^2 \rho'^{-2})^{1/2} - Z_0(\phi + \phi') \right. \\ &\quad \left. - Z_0 \cos^{-1}(Z_0/\rho) + Z_0 \cos^{-1}(Z_0/\rho') \right]. \end{aligned}$$

To calculate the amplitude in (26) we determine θ and θ' from (22) and (38) and observe that $\mathcal{K} = 0$. First we find

$$(50) \quad \dot{\theta}' \sec \theta' \tan \theta' = \dot{\theta} \sec \theta \tan \theta = -Z_0^{-1}.$$

$$(51) \quad \tan\theta + \dot{\theta} \sec\theta \tan\theta d(P, P_1) = \tan\left[\cos^{-1}(-Z_0 \rho^{-1}) - \phi\right] - Z_0^{-1} \rho \sin\phi \sec\left[\cos^{-1}(-Z_0 \rho^{-1}) - \phi\right]$$

$$= -(\rho^2 Z_0^{-2} - 1)^{1/2}$$

$$(52) \quad \tan\theta' + \dot{\theta}' \sec\theta' \tan\theta' d(Q, Q_1) = -(\rho'^2 Z_0^{-2} - 1)^{1/2}$$

When (51), (52) and (49) are used in (26), the final result for u when $\rho \cos\phi > \rho' \cos\phi'$ becomes

$$(53) \quad u(\rho, \phi) = (\rho^2 Z_0^{-2} - 1)^{-1/4} (\rho'^2 Z_0^{-2} - 2)^{-1/4}$$

$$\times \exp \left\{ ik \left[\rho (1 - Z_0^2 \rho^{-2})^{1/2} - \rho' (1 - Z_0^2 \rho'^{-2})^{1/2} - Z_0 (\phi + \phi') \right. \right.$$

$$\left. \left. - Z_0 \cos^{-1}(Z_0/\rho) + Z_0 \cos^{-1}(Z_0/\rho') \right] \right\}.$$

If $\rho \cos\phi < \rho' \cos\phi'$, $u(\rho, \phi)$ is obtained by interchanging primed and unprimed quantities in (53). In this case if P is near the tip, then $\rho < |Z_0|$ and (53) can be simplified. First we replace $\cos^{-1}(Z_0/\rho)$ by $i \log \left[\rho^{-1} (Z_0 + [Z_0^2 - \rho^2]^{1/2}) \right]$.

Then upon omitting some small terms, (53) becomes

$$(54) \quad u(\rho, \phi) = e^{-i\pi/4} (\rho'^2 Z_0^{-2} - 1)^{-1/4} \exp \left\{ ik \left[-iZ_0 + \rho' (1 - Z_0^2 \rho'^{-2})^{1/2} - Z_0 (\phi + \phi') \right. \right.$$

$$\left. \left. + Z_0 \cos^{-1}(Z_0/\rho') + iZ_0 \log(2Z_0/\rho) \right] \right\}.$$

If Q is also near the tip (54) can be further simplified.

Let us now compare our results (53) and (54) with the asymptotic form of the exact solution of the corresponding boundary value problem. We seek

a solution u of (19) with the source at (ρ', ϕ') . This solution must be defined in the region outside the wedge, i.e., in the region $0 \leq \phi \leq \alpha$. On the surface $\phi = 0$ it must satisfy (20) with Z given by (38). On $\phi = \alpha$ we require it to satisfy $u_\phi = 0$. The solution must also satisfy the radiation condition.

The solution of this problem has been found by L. Felsen [2]. It contains a surface wave given by

$$(55) \quad u(\rho, \phi) = -i\pi \frac{\cosh \eta(\alpha - \phi) \cosh \eta(\alpha - \phi')}{\alpha - i(kZ_0)^{-1} \sinh^2 \eta \alpha} J_{-i\eta}(k\rho_<) H_{-i\eta}^{(1)}(k\rho_>) .$$

Here $\rho_<$ and $\rho_>$ denote respectively the smaller and larger of the two quantities ρ' and ρ . The constant η is a solution of the equation

$$(56) \quad \coth \alpha = -\eta(kZ_0)^{-1} .$$

For large k the solution of (56) becomes

$$(57) \quad \eta \sim ikZ_0 .$$

Thus (55) becomes

$$(58) \quad u(\rho, \phi) \sim \pi k Z_0 e^{ikZ_0(\phi + \phi')} J_{kZ_0}(k\rho_<) H_{kZ_0}^{(1)}(k\rho_>) .$$

We now insert the Debye asymptotic forms of the Bessel and Hankel functions for large k with order less than the argument in absolute value. Then (58) becomes, if $\rho > \rho' > |Z_0|$

$$(59) \quad u(\rho, \phi) \sim Z_0 (\rho'^2 - Z_0^2)^{-1/4} (\rho^2 - Z_0^2)^{-1/4} e^{-ikZ(\phi' + \phi)} \\ \times \exp \left\{ ik \left[(\rho'^2 - Z_0^2)^{1/2} - (\rho^2 - Z_0^2)^{1/2} - Z_0 \cos^{-1}(Z_0/\rho') + Z_0 \cos^{-1}(Z_0/\rho) \right] \right\} .$$

This agrees exactly with (53). If $\rho < \rho'$ we must interchange ρ and ρ' in (59) and the result again agrees with (53) when it is similarly changed. If $\rho < |Z_0|$ and $\rho' > |Z_0|$ then (58) becomes identical with (54) when we insert the asymptotic form of the Bessel function for large k with order larger in magnitude than the argument, and omit some small terms. The agreement between the asymptotic form of the exact solution (55) and the solution (53) or (54) given by our method, is a confirmation of our theory.

8. Surface wave on a cylinder

Let us finally use our method to find the surface wave excited on a circular cylinder of radius a by a line source parallel to the cylinder axis. If the amplitude of the wave from the source is given by (24) then the surface wave is given by (26). We assume that the cylinder has a constant surface impedance. Then Θ in (26) is a constant determined by (22). Let the polar coordinates of Q and P be $(\rho', 0)$ and (ρ, ϕ) respectively. There are two rays from Q and P which traverse the cylinder in opposite directions. We first consider the shorter ray. See Figure 5. The two corresponding pairs of points Q_1, P_1 are found to have the coordinates $\rho(Q_1) = \rho(P_1) = a$ and

$$(60) \quad \phi(Q_1) = \cos^{-1}(-Z) - \sin^{-1}\left(\frac{a}{\rho}, \sqrt{1-Z^2}\right).$$

$$(61) \quad \phi(P_1) = \phi - \cos^{-1}(-Z) + \sin^{-1}\left(\frac{a}{\rho}, \sqrt{1-Z^2}\right)$$

Then we find that

$$(62) \quad d(Q, Q_1) = \rho' \left[\sqrt{1 - \left(\frac{a}{\rho'}\right)^2 (1-Z^2)} + \left(\frac{a}{\rho'}\right) Z \right]$$

$$(63) \quad d(P, P_1) = \rho \left[\sqrt{1 - \left(\frac{a}{\rho}\right)^2 (1-Z^2)} + \left(\frac{a}{\rho}\right) Z \right]$$

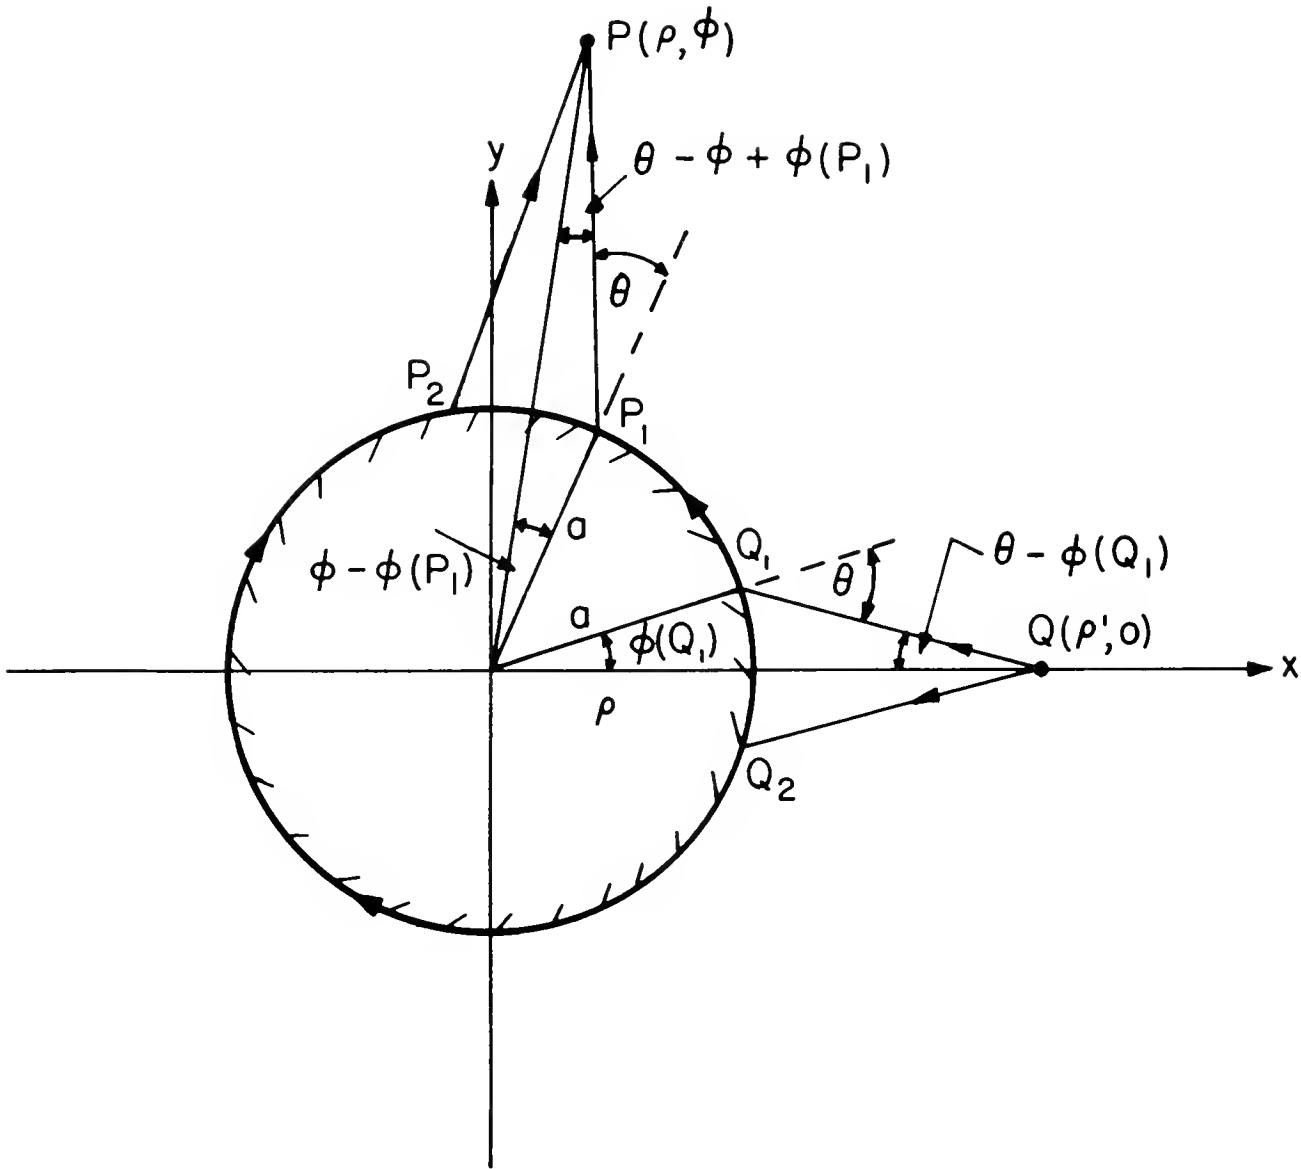


FIGURE 5

Excitation of a surface wave on a circular cylinder by a line source at Q . Two complex rays from Q hit the cylinder at the complex points Q_1 and Q_2 where they make the complex angle θ with the normal. This angle is determined by equation (22). The two complex surface rays which they excite travel around the cylinder in opposite directions. The complex space rays which they shed at P_1 and P_2 pass through P .

$$\begin{aligned}
 (64) \quad \phi_1(Q_1, P_1) &= k_1 a [\phi(P_1) - \phi(Q_1)] \\
 &= ka \sqrt{1-Z^2} \left[\phi - 2\cos^{-1}(-Z) + \sin^{-1}\left(\frac{a}{\rho} \sqrt{1-Z^2}\right) + \sin^{-1}\left(\frac{a}{\rho'}, \sqrt{1-Z^2}\right) \right].
 \end{aligned}$$

Similar results hold for the longer ray except that ϕ is replaced by $2\pi - \phi$ in (61) and (64). Upon inserting these expressions into (26) and simplifying, we obtain

$$\begin{aligned}
 (65) \quad u(\rho, \phi) &= \frac{-Z^2}{\sqrt{1-Z^2}} \left[\left(\frac{\rho}{a}\right)^2 - (1-Z^2) \right]^{-1/4} \left[\left(\frac{\rho'}{a}\right)^2 - (1-Z^2) \right]^{-1/4} \\
 &\propto \exp ika \left[\frac{\rho}{a} \sqrt{1 - \left(\frac{a}{\rho}\right)^2 (1-Z^2)} + \frac{\rho'}{a} \sqrt{1 - \left(\frac{a}{\rho'}\right)^2 (1-Z^2)} \right. \\
 &\quad \left. + \sqrt{1-Z^2} \left\{ \sin^{-1}\left(\frac{a}{\rho} \sqrt{1-Z^2}\right) + \sin^{-1}\left(\frac{a}{\rho'} \sqrt{1-Z^2}\right) \right\} \right. \\
 &\quad \left. + 2Z - 2 \sqrt{1-Z^2} \cos^{-1}(-Z) \right] \\
 &\propto \left[\exp ika \sqrt{1-Z^2} \phi + \exp ika \sqrt{1-Z^2} (2\pi - \phi) \right].
 \end{aligned}$$

There are also other rays from Q to P each of which encircles the cylinder n times before leaving at P_1 . The phase $\phi_1(Q_1, P_1)$ for such rays exceeds that given by (64) by the amount $2\pi n k_1 a = 2\pi n k a (1-Z^2)^{1/2}$. Their fields are computed from (65) by including this additional phase. When the fields on these rays are added together at P , a geometric series results. Its sum is the total surface wave at P which is

$$\begin{aligned}
 (66) \quad u(p, \vartheta) &= \frac{-z^2}{\sqrt{1-z^2}} \left[\left(\frac{\rho}{a} \right)^2 - (1-z^2) \right]^{-1/4} \left[\left(\frac{\rho'}{a} \right)^2 - (1-z^2) \right]^{-1/4} \\
 &\propto \exp ika \left[\frac{\rho}{a} \sqrt{1 - \left(\frac{a}{\rho} \right)^2 (1-z^2)} + \frac{\rho'}{a} \sqrt{1 - \left(\frac{a}{\rho'} \right)^2 (1-z^2)} \right. \\
 &\quad \left. + \sqrt{1-z^2} \left\{ \sin^{-1} \left(\frac{a}{\rho} \sqrt{1-z^2} \right) + \sin^{-1} \left(\frac{a}{\rho'} \sqrt{1-z^2} \right) \right\} \right. \\
 &\quad \left. + 2Z - 2 \sqrt{1-z^2} \cos^{-1}(-Z) \right] \\
 &\propto \left[\exp ika \sqrt{1-z^2} \vartheta + \exp ika \sqrt{1-z^2} (2\pi - \vartheta) \right] \frac{1}{1 - \exp \left[2\pi ika \sqrt{1-z^2} \right]}.
 \end{aligned}$$

We shall now compare this result with the solution of the corresponding boundary value problem. That problem was formulated and solved in [3] for a cylinder with an impedance Z . However, Z was not assumed to satisfy (21) so that surface waves of the type we are considering were not found. Instead only the diffracted fields associated with the real surface rays were considered. Those fields were obtained by finding the solutions v of the equation.

$$(67) \quad H_v^{(1)'}(ka) = -iZH_v^{(1)}(ka)$$

Each root v yielded a wave given by [see reference [3], p 43, eq.(4)]

$$(68) \quad u = -\frac{i\pi}{4} \sum_m \frac{\cos v_m (\theta - \pi)}{\sin v_m \pi} \frac{\Omega H_{v_m}^{(2)}(ka)}{\frac{\partial}{\partial v} \Omega H_{v_m}^{(1)}(ka)} H_{v_m}^{(1)}(k\rho) H_{v_m}^{(1)}(k\rho')$$

where $\Omega F(x) = \frac{d}{dx} F(x) + iZF(x)$.

When Z satisfies (21) the equation (67) has an additional solution which corresponds to the surface wave. It can be found by using in (67) the Debye asymptotic formula for the Hankel function for order and argument both large and $|v| > ka$. Then (67) becomes

$$(69) \quad i \sqrt{\frac{2}{\pi}} \frac{1}{[v^2 - (ka)^2]^{1/4}} \left\{ \frac{[v^2 - (ka)^2]^{1/2}}{ka} - iZ \right\} \exp \left\{ -[v^2 - (ka)^2]^{1/2} + v \cosh^{-1} \frac{v}{ka} \right\} = 0.$$

The solution of (69) is

$$(70) \quad v = ka(1-Z^2)^{1/2}.$$

When (70) is used in (68) and the asymptotic form of the Hankel function is employed, (68) becomes

$$(71) \quad u(\rho, \phi) = - \frac{Z^2}{\sqrt{1-Z^2}} \left[\left(\frac{\rho}{a} \right)^2 - (1-Z^2) \right]^{-1/4} \left[\left(\frac{\rho'}{a} \right)^2 - (1-Z^2) \right]^{-1/4} \\ \times \exp ika \left[\frac{\rho}{a} \sqrt{1 - \left(\frac{a}{\rho} \right)^2 (1-Z^2)} + \frac{\rho'}{a} \sqrt{1 - \left(\frac{a}{\rho'} \right)^2 (1-Z^2)} + \sqrt{1-Z^2} \left\{ \sin^{-1} \left(\frac{a}{\rho} \sqrt{1-Z^2} \right) \right. \right. \\ \left. \left. + \sin^{-1} \left(\frac{a}{\rho'} \sqrt{1-Z^2} \right) \right\} + 2Z-2 \sqrt{1-Z^2} \left\{ \frac{\pi}{2} - i \cosh^{-1} \sqrt{1-Z^2} \right\} \right] \\ \times \frac{\left[\exp ika \sqrt{1-Z^2} \phi + \exp ika \sqrt{1-Z^2} (2\pi - \phi) \right]}{1 - \exp [2\pi ika \sqrt{1-Z^2}]}.$$

This is the asymptotic form of the exact surface wave (68). After some algebraic manipulations, it agrees exactly with the result (66) given by our method.

References

- [1] Keller, J.B. - A Geometrical Theory of Diffraction; Proc. of Symposia in Appl. Math., Vol.VIII, Calculation of Variations and its Application (Ed., L.M. Graves), pp. 27-52, McGraw-Hill, N.Y., 1958. Also, N.Y.U., Inst. Math. Sci., Div. EM Res., Research Report No. EM-115, July, 1958.

- [2] Felsen, L.B. - Field solutions for a class of corrugated wedge and cone surfaces; Polytechnic Inst. of Brooklyn, Microwave Res. Inst., Memo. 32, July 19, 1957.

- [3] Levy, B.R. and - Diffraction by a smooth object; N.Y.U., Inst. Keller, J.B. Math. Sci., Div. EM Res., Research Report No. EM-109, Dec., 1957.

DISTRIBUTION LIST FOR RESEARCH REPORTS

Contract No. AF 19(604)1717

(ONE copy unless otherwise noted)

Commander Air Research and Development Command Andrews Air Force Base Washington 25, D. C. Attn: Major E. Wright, RDTCC	Director Evans Signal Laboratory Belmar, New Jersey Attn: Mr. O. C. Woodyard	(5) Hq. Air Force Cambridge Research Center Laurence G. Hanscom Field Bedford, Mass. Attn: CRRD
Director of Resident Training 3380th Technical Training Group Keesler Air Force Base, Mississippi Attn: OA-3011 Course	U. S. Army Signal Engineering Labs. Evans Signal Laboratory Belmar, New Jersey Attn: Technical Document Center	Director, Avionics Division (AV) Bureau of Aeronautics Department of the Navy Washington 25, D. C.
Director Air University Library Maxwell Air Force Base, Alabama	Massachusetts Institute of Technology Signal Corps Liaison Officer Cambridge 39, Mass. Attn: A. D. Bedrosian, Room 26-131	Chief, Bureau of Ships Department of the Navy Washington 25, D. C. Attn: Mr. E. Johnston, Code 833E
Commander Air Force Missile Test Center Patrick Air Force Base, Florida Attn: MTE - for classified documents Attn: MU-411, Technical Library - for unclassified documents	Commanding General, SIGFM/EL-PC U. S. Army Signal Engineering Labs. Fort Monmouth, New Jersey Attn: Dr. Horst H. Kedessy Deputy Chief, Chem-Physics Branch	Commander U. S. Naval Air Missile Test Center Point Mugu, California Attn: Code 366
Tactical Air Group Directorate of Research and Development DCS/D Headquarters, USAF Washington, D. C. Attn: Major R. L. Stell	Commander Army Rocket and Guided Missile Agency Redstone Arsenal, Alabama Attn: Technical Library, ORDXR-OTL	U. S. Naval Ordnance Laboratory White Oak Silver Spring 19, Maryland Attn: The Library
Director, Communications and Electronics Hq. U. S. Air Force Washington 25, D. C. Attn: AFOAC S/E	Commanding General U. S. Army Signal Engineering Labs. Fort Monmouth, New Jersey Attn: SIGFM/EL-AT	Commander U. S. Naval Ordnance Test Station China Lake, California Attn: Code 753
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio Attn: WCLRS-6, Mr. Portune	Department of the Army Office of the Chief Signal Officer Washington 25, D. C. Attn: SIGRD-7	Librarian U. S. Naval Postgraduate School Monterey, California
Wright Air Development Center Wright-Patterson Air Force Base, Ohio Flight Research Laboratory Research Division Attn: WCRRA	Office of Chief Signal Officer Engineering and Technical Division Washington 25, D. C. Attn: SIGNET-5	Air Force Development Field Representative Naval Research Laboratory Washington 25, D. C. Attn: Code 1072
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio Attn: N. Draganjac, WCLNO-4	Guided Missile Fuze Library Diamond Ordnance Fuze Laboratories Washington 25, D. C. Attn: R. D. Hatcher, Chief Microwave Development Section	Director U. S. Naval Research Laboratory Washington 25, D. C. Attn: Code 2027
Commander Wright Air Development Center Wright-Patterson Air Force Base, Ohio Attn: Mr. Paul Springer, WCLRE-5	(10) Armed Services Technical Information Agency Arlington Hall Station Arlington 12, Virginia	Dr. J. I. Bohnert, Code 5210 U. S. Naval Research Laboratory Washington 25, D. C. (Unclassified only) Classified to be sent to: Director U. S. Naval Research Laboratory Attn: Code 5200 Washington 25, D. C.
Commander Air Technical Intelligence Center Wright-Patterson Air Force Base, Ohio Attn: ARFCIN-4B1a	(2) Library Boulder Laboratories National Bureau of Standards Boulder, Colorado	Commanding Officer and Director U. S. Navy Underwater Sound Laboratory Fort Trumbull, New London, Connecticut
Commander Rome Air Development Center Griffiss Air Force Base, New York Attn: RGSSTL-1	National Bureau of Standards Department of Commerce Washington 25, D. C. Attn: Mr. A. G. McNish	Chief of Naval Research Department of the Navy Washington 25, D. C. Attn: Code 427
Commander Rome Air Development Center Griffiss Air Force Base, New York Attn: Mr. Donald Dakan, RCUE	National Bureau of Standards Department of Commerce Washington 25, D. C. Attn: Gustave Shapiro, Chief Engineering Electronics Section Electricity and Electronics Div.	Commanding Officer and Director U. S. Navy Electronics Laboratory (Library) San Diego 52, California
Commander Rome Air Development Center (ARDC) Griffiss Air Force Base, New York Attn: Dr. John S. Burgess, RCE	(2) Office of Technical Services Department of Commerce Washington 25, D. C. Attn: Technical Reports Section (Unclassified only)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D. C. Attn: Code Ad3
Commander Air Force Missile Development Center Holloman Air Force Base, New Mexico Attn: HDOIL, Technical Library	Director National Security Agency Washington 25, D. C. Attn: R/D (331)	Chief, Bureau of Ordnance Department of the Navy Washington 25, D. C. Attn: Fire Control Branch (ReSh)
Director U. S. Army Ordnance Ballistic Research Laboratories Aberdeen Proving Ground, Maryland Attn: Ballistic Measurements Laboratory	(2) Hq. Air Force Cambridge Research Center Laurence G. Hanscom Field Bedford, Mass. Attn: CROTLR-2 - P. Condon	Department of the Navy Bureau of Aeronautics Technical Data Division, Code 4106 Washington 25, D. C.
Ballistic Research Laboratories Aberdeen Proving Ground, Maryland Attn: Technical Information Branch	(5) Hq. Air Force Cambridge Research Center Laurence G. Hanscom Field Bedford, Mass. Attn: CROTLR - J. Armstrong	Chief, Bureau of Ships Department of the Navy Washington 25, D. C. Attn: Code 817B

Commanding Officer
U. S. Naval Air Development Center
Johnsville, Pennsylvania
Attn: NADC Library

Commander
U. S. Naval Air Test Center
Patuxent River, Maryland
Attn: ET-315, Antenna Branch

Director
Naval Ordnance Laboratory
Corona, California

Commanding Officer
U. S. Naval Ordnance Laboratory
Corona, California
Attn: Mr. W. Horenstein, Division 72

Airborne Instruments Laboratory, Inc.
160 Old Country Road
Mineola, New York
Attn: Dr. E. G. Fubini, Director
Research and Engineering Division

Aircom, Inc.
35 1/2 Main Street
Winthrop, Mass.

American Machine and Foundry Company
Electronics Division
1085 Commonwealth Avenue
Boston 15, Mass.
Attn: Mrs. Rita Moravcsik, Librarian

Andrew Alford, Consulting Engineers
299 Atlantic Avenue
Boston 10, Mass.

Avion Division
ACF Industries, Inc.
800 No. Pitt Street
Alexandria, Virginia
Attn: Library

Battelle Memorial Institute
505 King Avenue
Attn: Wayne E. Rife, Project Leader
Electrical Engineering Division
Columbus 1, Ohio

Bell Aircraft Corporation
Post Office Box One
Buffalo 5, New York
Attn: Eunice P. Hazelton, Librarian

Bell Telephone Laboratories, Inc.
Whippany Laboratory
Whippany, New Jersey
Attn: Technical Information Library

Pacific Division
Bendix Aviation Corporation
11600 Sherman Way
North Hollywood, California
Engineering Library
Attn: Peggie Robinson, Librarian

Bendix Radio Division
Bendix Aviation Corp.
E. Joppa Road
Towson 4, Maryland
Attn: Dr. D. M. Allison, Jr.
Director Engineering and Research

Boeing Airplane Company
Pilotless Aircraft Division
P.O. Box 3707
Seattle 24, Washington
Attn: R.R. Barber, Library Supervisor

Boeing Airplane Company
Wichita Division Engineering Library
Wichita 1, Kansas
Attn: Kenneth C. Knight, Librarian

Boeing Airplane Company
Seattle Division
Seattle 14, Washington
Attn: E.T. Allen, Library Supervisor

Bjorksten Research Labs, Inc.
P. O. Box 265
Madison, Wisconsin
Attn: Mrs. Fern B. Korsgard

Convair, A Division of General Dynamics Corp.
Fort Worth, Texas
Attn: K.G. Brown, Division Research Librarian

Convair, A Division of General Dynamics Corp.
San Diego 12, California
Attn: Mrs. Dore B. Burke,
Engineering Librarian

Cornell Aeronautical Laboratory, Inc.
4455 Genesee Street
Buffalo 21, New York
Attn: Librarian

Delmo Victor Company
A Division of Textron, Inc.
1515 Industrial Way
Belmont, California
Attn: Mary Ellen Addems,
Technical Librarian

Derne and Margolin, Inc.
29 New York Avenue
Westbury, Long Island, N. Y.

Douglas Aircraft Company, Inc.
P.O. Box 200
Long Beach 1, California
Attn: Engineering Library (C-250)

Douglas Aircraft Co., Inc.
827 Lapham Street
El Segundo, California
Attn: Engineering Library

Douglas Aircraft Company, Inc.
3000 Ocean Park Boulevard
Santa Monica, California
Attn: P.T. Cline
Eq. Sec. Reference Files,
Eq. Eng. A250

Douglas Aircraft Company, Inc.
2000 North Memorial Drive
Tulsa, Oklahoma
Attn: Engineering Library, D-250

Electronics Communication, Inc.
1830 York Road
Timonium, Maryland

Emerson and Cuming, Inc.
869 Washington Street
Canton, Mass.
Attn: Mr. W. Cuming

Emerson Electric Mfg. Co.
8100 West Florissant Avenue
St. Louis 21, Missouri
Attn: Mr. E.R. Breslin, Librarian

Sylvania Elec. Prod. Inc.
Electronic Defense Laboratory
P.O. Box 205 - (Uncl)
Mountain View, California
Attn: Library

Fairchild Aircraft Division
Fairchild Eng. and Airplane Corp.
Hagerstown, Maryland
Attn: Library

Farnsworth Electronics Company
3700 East Pontiac Street
Fort Wayne 1, Indiana
Attn: Technical Library

Federal Telecommunication Labs.
500 Washington Avenue
Nutley 10, New Jersey
Attn: Technical Library

The Gabriel Electronics
Division of the Gabriel Company
135 Crescent Road
Needham Heights 94, Mass.
Attn: Mr. Steven Galagan

General Electric Advanced Electronics Center
Cornell University
Ithaca, New York
Attn: J. B. Travis

General Electric Company
Electronics Park
Syracuse, New York
Attn: Documents Library, B. Fletcher
Building 3-143A

General Precision Laboratory, Inc.
63 Bedford Road
Pleasantville, New York
Attn: Mrs. Mary G. Herbst, Librarian

Goodyear Aircraft Corp.
1210 Massillon Road
Akron 15, Ohio
Attn: Library D/120 Plant A

Granger Associates
Electronic Systems
966 Commercial Street
Palo Alto, California
Attn: John V. N. Granger, President

Grumman Aircraft Engineering Corporation
Bethpage, Long Island, N. Y.
Attn: Mrs. A. M. Gray, Librarian
Engineering Library, Plant No. 5

The Hallcrafters Company
4401 West 5th Avenue
Chicago 24, Illinois
Attn: LaVerne LaGioia, Librarian

Hoffman Laboratories, Inc.
3761 South Hill Street
Los Angeles 7, California
Attn: Engineering Library

Hughes Aircraft Company
Antenna Department
Microwave Laboratory
Building 12, Room 2617
Culver City, California
Attn: M. D. Adecock

Hughes Aircraft Company
Florence and Teale Streets
Culver City, California
Attn: Dr. L.C. Van Atta, Associate Director
Research Labs.

Hycon Eastern, Inc.
75 Cambridge Parkway
Cambridge, Mass.
Attn: Mrs. Lois Seulowitz
Technical Librarian

International Business Machines Corp.
Military Products Division
590 Madison Avenue
New York 33, New York
Attn: Mr. C.F. McElwain, General Manager

International Business Machines Corp.
Military Products Division
Owego, New York
Attn: Mr. D. I. Marr, Librarian
Department 459

International Resistance Company
401 N. Broad Street
Philadelphia 8, Pa.
Attn: Research Library

Jansky and Bailey, Inc.
1339 Wisconsin Avenue, N. W.
Washington 7, D. C.
Attn: Mr. Delmer C. Ports

Dr. Henry Jesik, Consulting Engineer
298 Shames Drive
Brush Hollow Industrial Park
Westbury, New York

Electromagnetic Research Corporation
711 14th Street, N. W.
Washington 5, D. C.

Lockheed Aircraft Corporation
2555 N. Hollywood Way
California Division Engineering Library
Department 72-75, Plant A-1, Bldg. 63-1
Burbank, California
Attn: N. C. Harnois

The Martin Company
P. O. Box 179
Denver 1, Colorado
Attn: Mr. Jack McCormick

The Glenn L. Martin Company
Baltimore 3, Maryland
Attn: Engineering Library
Antenna Design Group

Maryland Electronic Manufacturing Corp.
5009 Calvert Road
College Park, Maryland
Attn: Mr. H. Warren Cooper

Mathematical Reviews
190 Hope Street
Providence 6, Rhode Island

The W. L. Maxson Corporation
460 West 34th Street
New York, N. Y.
Attn: Miss Dorothy Clark

McDonnell Aircraft Corporation
Lambert Saint-Louis Municipal Airport
Box 516, St. Louis 3, Missouri
Attn: R. D. Detrich, Engineering Library

McMillan Laboratory, Inc.
Brownville Avenue
Ipswich, Massachusetts
Attn: Security Officer, Document Room

Melpar, Inc.
3000 Arlington Boulevard
Falls Church, Virginia
Attn: Engineering Technical Library

Microwave Development Laboratory
90 Broad Street
Babson Park 57, Massachusetts
Attn: N. Tucker, General Manager

Microwave Radiation Company Inc.
19223 South Hamilton Street
Gardena, California
Attn: Mr. Morris J. Ehrlich, President

Chance Vought Aircraft, Inc.
9314 West Jefferson Street
Dallas, Texas
Attn: Mr. H. S. White, Librarian

Northrop Aircraft, Inc.
Hawthorne, California
Attn: Mr. E. A. Freitas, Library Dept. 3145
1001 E. Broadway

Remington Rand Univ. - Division of Sperry
Rand Corporation
1900 West Allegheny Avenue
Philadelphia 29, Pennsylvania
Attn: Mr. John F. McCarthy
R and D Sales and Contracts

North American Aviation, Inc.
12214 Lakewood Boulevard
Downey, California
Attn: Engineering Library 495-115

North American Aviation, Inc.
Los Angeles International Airport
Los Angeles 45, California
Attn: Engineering Technical File

Page Communications Engineers, Inc.
710 Fourteenth Street, Northwest
Washington 5, D. C.
Attn: Librarian

Philco Corporation Research Division
Branch Library
4700 Wissachickon Avenue
Philadelphia 14, Pa.
Attn: Mrs. Dorothy S. Collins

Pickard and Burns, Inc.
240 Highland Avenue
Needham 94, Mass.
Attn: Dr. J. T. DePettencourt

Polytechnic Research and Development
Company, Inc.
202 Tillary Street
Brooklyn 1, New York
Attn: Technical Library

Radiation Engineering Laboratory
Main Street
Maynard, Mass.
Attn: Dr. John Ruze

Radiation, Inc.
P. O. Drawer 37
Melbourne, Florida
Attn: Technical Library, Mr. M.L. Cox

Radio Corp. of America
RCA Laboratories
Rocky Point, New York
Attn: P. S. Carter, Lab. Library

RCA Laboratories
David Sarnoff Research Center
Princeton, New Jersey
Attn: Miss Fern Cloak, Librarian
Research Library

Radio Corporation of America
Defense Electronic Products
Building 10, Floor 7
Camden 2, New Jersey
Attn: Mr. Harold J. Schrader
Staff Engineer, Organization
of Chief Technical
Administrator

(2) The Ramo-Wooldridge Corporation
P.O. Box 45453 Airport Station
Los Angeles 45, California
Attn: Margaret C. Whitnah,
Chief Librarian

Hoover Microwave Co.
9592 Baltimore Avenue
College Park, Maryland

Director, USAF Project RAND
Via: Air Force Liaison Office
The Rand Corporation
1700 Main Street
Santa Monica, California

Rantec Corporation
Calebasas, California
Attn: Grace Keener, Office Manager

Raytheon Manufacturing Company
Missile Systems Division
Bedford, Mass.
Attn: Mr. Irving Goldstein

Raytheon Manufacturing Company
Wayland Laboratory, State Road
Wayland, Mass.
Attn: Mr. Robert Borts

Raytheon Manufacturing Company
Wayland Laboratory
Wayland, Mass.
Attn: Miss Alice G. Anderson,
Librarian

Republic Aviation Corporation
Farmingdale, Long Island, N. Y.
Attn: Engineering Library

Thru: Air Force Plant Representative
Republic Aviation Corp.
Farmingdale, Long Island, N.Y.

Rheem Manufacturing Company
9236 East Hall Road
Downey, California
Attn: J. C. Joerger

Trans-Tech, Inc.
P. O. Box 346
Frederick, Maryland

Ryan Aeronautical Company
Lindbergh Field
San Diego 12, California
Attn: Library - unclassified

Sage Laboratories
159 Linden Street
Wellesley 81, Mass.

Sanders Associates
95 Canal Street
Nashua, New Hampshire
Attn: N. R. Wild, Librarian

Sandia Corporation, Sandia Base
P.O. Box 5800, Albuquerque, New Mexico
Attn: Classified Document Division

Sperry Gyroscope Company
Great Neck, Long Island, New York
Attn: Florence W. Turnbull, Engr. Librarian

Stanford Research Institute
Menlo Park, California
Attn: Library, Engineering Division

Sylvania Electric Products, Inc.
100 First Avenue
Waltham 54, Mass.
Attn: Charles A. Thornhill, Report Librarian
Waltham Laboratories Library

Systems Laboratories Corporation
14852 Ventura Boulevard
Sherman Oaks, California
Attn: Donald L. Mergerum

TRG, Inc.
17 Union Square West
New York 3, N. Y.
Attn: M. L. Henderson, Librarian

A. S. Thomas, Inc.
161 Devonshire Street
Boston 10, Mass.
Attn: A. S. Thomas, President

Bell Telephone Laboratories
Murray Hill
New Jersey

Chu Associates
P. O. Box 387
Whitcomb Avenue
Littleton, Mass.

Microwave Associates, Inc.
Burlington, Mass.

Raytheon Manufacturing Company
Missile Division
Hartwell Road
Bedford, Mass.

Radio Corporation of America
Aviation Systems Laboratory
225 Crescent Street
Waltham, Mass.

Lockheed Aircraft Corporation
Missile Systems Division Research Library
Box 504, Sunnyvale, California
Attn: Miss Eva Lou Robertson,
Chief Librarian

The Rand Corporation
1700 Main Street
Santa Monica, California
Attn: Dr. W. C. Hoffman

Commander
AF Office of Scientific Research
Air Research and Development Command
11th Street and Constitution Avenue
Washington, D. C.
Attn: Mr. Otting, SRY

Westinghouse Electric Corp.
Electronics Division
Friendship Int'l Airport Box 746
Baltimore 3, Maryland
Attn: Engineering Library

Wheeler Laboratories, Inc.
122 Cutter Mill Road
Great Neck, New York
Attn: Mr. Harold A. Wheeler

Zenith Plastics Co.
Box 91
Gardena, California
Attn: Mr. S. S. Oleesky

Library Geophysical Institute
of the University of Alaska
College
Alaska

University of California
Berkeley 4, California
Attn: Dr. Samuel Silver,
Prof. Engineering Science
Division of Elec. Eng. Electronics
Research Lab.

University of California
Electronics Research Lab.
332 Corv Hall
Berkeley 4, California
Attn: J. R. Whinnery

California Institute of Technology
Jet Propulsion Laboratory
4800 Oak Grove Drive
Pasadena, California
Attn: Mr. I. E. Newlan

California Institute of Technology
1201 E. California Street
Pasadena, California
Attn: Dr. C. Papas

Carnegie Institute of Technology,
Schenley Park
Pittsburgh 13, Pennsylvania
Attn: Prof. A. E. Heins

Cornell University
School of Electrical Engineering
Ithaca, New York
Attn: Prof. G. C. Dalman

University of Florida
Department of Electrical Engineering
Gainesville, Florida
Attn: Prof. M. H. Latour, Library

Library
Georgia Institute of Technology
Engineering Experiment Station
Atlanta, Georgia
Attn: Mrs. J.H. Crosland, Librarian

Harvard University
Technical Reports Collection
Gordon McKay Library, 303A Pierce Hall
Oxford Street, Cambridge 38, Mass.
Attn: Mrs. E.L. Hufschmidt, Librarian

Harvard College Observatory
60 Garden Street
Cambridge 39, Mass.
Attn: Dr. Fred L. Whipple

University of Illinois
Documents Division Library
Urbana, Illinois

University of Illinois
College of Engineering
Urbana, Illinois
Attn: Dr. P. E. Moyes, Department of
Electrical Engineering

The Johns Hopkins University
Homewood Campus
Department of Physics
Baltimore 18, Maryland
Attn: Dr. Donald E. Kerr

Sandia Corporation
Attn: Organization 1423
Sandia Base
Albuquerque, New Mexico

Applied Physics Laboratory
The Johns Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland
Attn: Mr. George L. Seielstad

Massachusetts Institute of Technology
Research Laboratory of Electronics
Room 20B-221
Cambridge 39, Massachusetts
Attn: John H. Hewitt

Massachusetts Institute of Technology
Lincoln Laboratory
P. O. Box 73
Lexington 73, Mass.
Attn: Document Room A-229

University of Michigan
Electronic Defense Group
Engineering Research Institute
Ann Arbor, Michigan
Attn: J. A. Boyd, Supervisor

University of Michigan
Engineering Research Institute
Radiation Laboratory
Attn: Prof. K. M. Siegel
912 N. Main St.,
Ann Arbor, Michigan

University of Michigan
Engineering Research Institute
Willow Run Laboratories
Willow Run Airport
Ypsilanti, Michigan
Attn: Librarian

University of Minnesota
Minneapolis 14, Minnesota
Attn: Mr. Robert H. Stumm, Library

Northwestern University
Microwave Laboratories
Evanston, Illinois
Attn: R. E. Beam

Ohio State University Research Found.
Ohio State University
Columbus 10, Ohio
Attn: Dr. T.E. Tice
Dept. of Elec. Engineering

The University of Oklahoma
Research Institute
Norman, Oklahoma
Attn: Prof. C. L. Farrar, Chairman
Electrical Engineering

Polytechnic Institute of Brooklyn
Microwave Research Institute
55 Johnson Street
Brooklyn, New York
Attn: Dr. Arthur A. Oliner

Polytechnic Institute of Brooklyn
Microwave Research Institute
55 Johnson Street
Brooklyn, New York
Attn: Mr. A. E. Laemmel

Syracuse University Research Institute
Cortlandale Campus
Syracuse 10, New York
Attn: Dr. C. S. Grove, Jr.
Director of Engineering Research

The University of Texas
Elec. Engineering Research Laboratory
P. O. Box 8026, University Station
Austin 12, Texas
Attn: Mr. John R. Gerhardt
Assistant Director

The University of Texas
Defense Research Laboratory
Austin, Texas
Attn: Claude W. Horton, Physics Library

University of Toronto
Department of Electrical Engineering
Toronto, Canada
Attn: Prof. G. Sinclair

Lowell Technological Institute
Research Foundation
P. O. Box 709, Lowell, Mass.
Attn: Dr. Charles R. Mingins

University of Washington
Department of Electrical Engineering
Seattle 5, Washington
Attn: G. Held, Associate Professor

Stanford University
Stanford, California
Attn: Dr. Chodorow
Microwave Laboratory

Physical Science Laboratory
New Mexico College of Agriculture
and Mechanic Arts
State College, New Mexico
Attn: Mr. H. W. Haas

Brown University
Department of Electrical Engineering
Providence, Rhode Island
Attn: Dr. C. M. Angulo

Case Institute of Technology
Cleveland, Ohio
Attn: Prof. S. Seeley

Columbia University
Department of Electrical Engineering
Morningside Heights
New York, N. Y.
Attn: Dr. Chlesinger

McGill University
Montreal, Canada
Attn: Prof. G. A. Woonton
Director, The Eaton Electronics
Research Lab.

Purdue University
Department of Electrical Engineering
Lafayette, Indiana
Attn: Dr. Schultz

The Pennsylvania State University
Department of Electrical Engineering
University Park, Pennsylvania

University of Pennsylvania
Institute of Cooperative Research
3400 Walnut Street
Philadelphia, Pennsylvania
Attn: Dept. of Electrical Engineering

University of Tennessee
Ferris Hall
W. Cumberland Avenue
Knoxville 16, Tennessee

University of Wisconsin
Department of Electrical Engineering
Madison, Wisconsin
Attn: Dr. Scheibe

University of Seattle
Department of Electrical Engineering
Seattle, Washington
Attn: Dr. D. K. Reynolds

Wayne University
Detroit, Michigan
Attn: Prof. A. F. Stevenson

Electronics Research Laboratory
Illinois Institute of Technology
3300 So. Federal Street
Chicago 16, Illinois
Attn: Dr. Lester C. Peach
Research Engineer

Advisory Group on Electronic Parts
Room 103
Moore School Building
200 South 33rd Street
Philadelphia 4, Pennsylvania

Ionosphere Research Laboratory
Pennsylvania State College
State College, Pennsylvania
ATTN: Professor A. H. Waynick, Director

Institute of Mathematical Sciences
25 Waverly Place
New York 3, New York
ATTN: Librarian

Electronics Division
Rand Corporation
1700 Main Street
Santa Monica, California
ATTN: Dr. Robert Kalaba

National Bureau of Standards
Washington, D. C.
ATTN: Dr. W. K. Saunders

Applied Mathematics and Statistics Lab.
Stanford University
Stanford, California
ATTN: Dr. Albert H. Bowker

Department of Physics and Astronomy
Michigan State College
East Lansing, Michigan
ATTN: Dr. A. Leitner

University of Tennessee
Knoxville, Tennessee
ATTN: Dr. Fred A. Ficken

Lebanon Valley College
Annville, Pennsylvania
ATTN: Professor B.H. Bissinger

General Atomic
P. O. Box 608
San Diego 12, California
Attn: Dr. Edward Gerjuoy

Department of Physics
Amherst College
Amherst, Mass.
ATTN: Dr. Arnold Arons

California Institute of Technology
1201 E. California Street
Pasadena, California
ATTN: Dr. A. Erdelyi

Mathematics Department
Stanford University
Stanford, California
ATTN: Dr. Harold Levine

University of Minnesota
Minneapolis 14, Minnesota
ATTN: Professor Paul C. Rosenbloom

Department of Mathematics
Stanford University
Stanford, California
ATTN: Professor Bernard Epstein

Applied Physics Laboratory
The Johns Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland
ATTN: Dr. B. S. Gourary

(2) Exchange and Gift Division
The Library of Congress
Washington 25, D. C.

Electrical Engineering Department
Massachusetts Institute of Technology
Cambridge 39, Mass.
ATTN: Dr. L. J. Chu

Nuclear Development Associates, Inc.
5 New Street
White Plains, New York
ATTN: Library

California Institute of Technology
Electrical Engineering
Pasadena, California
ATTN: Dr. Zohrab A. Kaprielian

Dr. Rodman Doll
311 W. Cross Street
Ypsilanti, Michigan

California Inst. of Technology
Pasadena, California
ATTN: Mr. Calvin Wilcox

(3) Mr. Robert Brockhurst
Woods Hole Oceanographic Institute
Woods Hole, Mass.

National Bureau of Standards
Boulder, Colorado
ATTN: Dr. R. Gallet

Dr. Solomon L. Schwebel
3689 Louis Road
Palo Alto, California

University of Minnesota
The University of Library
Minneapolis 14, Minnesota
ATTN: Exchange Division

Department of Mathematics
University of California
Berkeley, California
ATTN: Professor Bernard Friedman

Lincoln Laboratory
Massachusetts Institute of Technology
P. O. Box 73
Lexington 73, Massachusetts
ATTN: Dr. Shou Chin Wang, Room C-351

Melpar, Inc.,
3000 Arlington Boulevard
Falls Church, Virginia
ATTN: Mr. K. S. Kelleher, Section Head

Hq. Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Mass.
ATTN: Mr. Francis J. Zucker, CRRD

Hq. Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Mass.
ATTN: Dr. Philip Newman, CRRK

Mr. N. C. Gerson
Trapelo Road
South Lincoln, Mass.

Dr. Richard B. Berrar
Systems Development Corp.
2400 Colorado Avenue
Santa Monica, California

Columbia University Hudson Laboratories
P.O. Box 239
145 Palisade Street, Dobbs Ferry, N. Y.
ATTN: Dr. N. W. Johnson

Institute of Fluid Dynamics
and Applied Mathematics
University of Maryland
College Park, Maryland
ATTN: Dr. Elliott Montroll

Department of Electrical Engineering
Washington University
Saint Louis 5, Mo.
ATTN: Professor J. Van Bladel

Department of the Navy
Office of Naval Research Branch Office
1030 E. Green Street
Pasadena 1, California

Brandeis University
Waltham, Mass.
ATTN: Library

General Electric Company
Microwave Laboratory
Electronics Division
Stanford Industrial Park
Palo Alto, California
ATTN: Library

Smyth Research Associates
3555 Aero Court
San Diego 3, California
ATTN: Dr. John B. Smyth

Electrical Engineering
California Institute of Technology
Pasadena, California
ATTN: Dr. Georges C. Weill

Naval Research Laboratory
Washington 25, D. C.
ATTN: Henry J. Passerini, Code 5278A

Dr. George Kear
5 Culver Court
Orinda, California

Brooklyn Polytechnic
85 Livingston Street
Brooklyn, New York
ATTN: Dr. Nathan Marcuvitz

Department of Electrical Engineering
Brooklyn Polytechnic
85 Livingston Street
Brooklyn, New York
ATTN: Dr. Jerry Shmoys

Department of Mathematics
University of New Mexico
Albuquerque, New Mexico
ATTN: Dr. I. Kolodner

Mathematics Department
Polytechnic Institute of Brooklyn
Johnson and Jay Street
Brooklyn, New York
ATTN: Dr. Harry Hochstadt

Ballistics Research Laboratory
Aberdeen Proving Grounds
Aberdeen, Maryland
ATTN: Dr. Pullen Keats

Dr. Lester Kraus
4935 Whitehaven Way
San Diego, California

University of Minnesota
Institute of Technology
Minneapolis, Minnesota
Attn: Dean Athelston Spilhaus

Ohio State University
Columbus, Ohio
Attn: Prof. C. T. Tai
Department of Electrical Eng.

Naval Research Laboratories
Washington 25, D. C.
Attn: W. S. Ament, Code 5271

Naval Research Laboratory
Washington 25, D. C.
Attn: Dr. Leslie G. McCracken, Jr.
Code 3933A

Office of Naval Research
Department of the Navy
Attn: Geophysics Branch, Code 416
Washington 25, D. C.

Office of Chief Signal Officer
Signal Plans and Operations Division
Attn: SIGOL-2, Room 20
Com. Liaison Br., Radio Prop. Sect.
The Pentagon, Washington 25, D. C.

Defence Research Member
Canadian Joint Staff
2001 Connecticut Street
Washington, D. C.

Central Radio Prop. Lab.
National Bureau of Standards
Attn: Technical Reports Library
Boulder, Colorado

U. S. Weather Bureau
U. S. Department of Commerce
Washington 25, D. C.
Attn: Dr. Harry Wexler

Federal Communications Commission
Washington 25, D. C.
Attn: Mrs. Barbara C. Grimes, Librarian

Upper Atmosphere Research Section
Central Radio Propagation Laboratory
National Bureau of Standards
Boulder, Colorado

Argonne National Laboratory
P.O. Box 299
Lemont, Illinois
Attn: Dr. Hoylande D. Young

Bell Telephone Labs.
Murray Hill, New Jersey
Attn: Dr. S. O. Rice, 3B - 203

Carnegie Institute of Washington
Dept. of Terrestrial Magnetism
5241 Broad Branch Road, N. W.
Washington 15, D. C.
Attn: Library

Georgia Tech Research Institute
225 N. Avenue, N. W.
Attn: Dr. James E. Boyd
Atlanta, Georgia

University of Maryland
College Park, Maryland
Attn: Dr. A. Weinstein
Institute of Fluid Dynamics

Massachusetts Institute of Technology
Lincoln Laboratory
P. O. Box 73
Lexington 73, Massachusetts
Attn: Prof. Radford, Division 3 Head

Willow Run Research Center
University of Michigan
Willow Run Airport
Ypsilanti, Michigan
Attn: Dr. C. L. Dolph

School of Engineering
New York University
University Heights
New York, New York

Shell Fellowship Committee of the
Shell Companies Foundation, Inc.
50 West 50th Street
New York 20, N. Y.
Attn: Mr. J. R. Janassen

Esso Research and Engineering Co.
P. O. Box 51
Linden, New Jersey
Attn: Mr. C. L. Brown, Manager

Union Carbide and Carbon Corp.
30 E. 42nd Street
New York 17, New York
Attn: Mr. L. E. Erlanson

Convair
San Diego 12, California
Attn: Mr. Marvin Stern

Bell Telephone Labs., Inc.
463 West Street
New York 13, N. Y.
Attn: Dr. Mervin J. Kelly

Engineering Library
University of California
405 Hilgard Avenue
Los Angeles 24, California

Convair, A Division of General Dynamics Corp.
Daingerfield, Texas
Attn: J. E. Arnold, Division Manager

Convair, A Division of General Dynamics Corp.
San Diego 12, California
Attn: R. L. Bayless, Chief Engineer

Convair, a Division of General Dynamics Corp.
San Diego 12, California
Attn: K. J. Bossart, Chief Engineer-WS107A

Convair, A Div. of General Dynamics
Corp.
Fort Worth 1, Texas
Attn: F. W. Davis, Chief Engineer

Convair, A Div. of General Dynamics
Corp.
Pomona, California
Attn: C. D. Perrine
Ass't Div. Manager, Engin.

Shell Development Company
Exploration and Production Res. Div.
3737 Bellaire Boulevard
Houston 25, Texas
Attn: Miss Aphrodite Mamoulides

RCA Laboratories
Princeton, New Jersey
Attn: Dr. Charles Polk

Stanford Research Institute
S. Pasadena, California
Attn: Dr. J. Brandstatten

Wayne State University
Kresge-Hooker Science Library
5250 Second Boulevard
Detroit 2, Michigan

ARRA
1 Bond Street
Westbury, L. I., New York
Attn: Dr. Norman Spector

Varian Associates
611 Hansen Way
Palo Alto, California
Attn: Mrs. Perry Conway
Technical Librarian

Case Institute of Technology
Department of Electrical Engin.
University Circle
Cleveland 6, Ohio
Attn: Prof. Robert Plonsey

Dr. Ming S. Wong, ORRKP
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts

Physics Section
ATCO-RAD Division
20 South Union Street
Lawrence, Mass.
Attn: Dr. Ernest Bauer

Advanced Development Section
Western Development Labs.
Philco Corp.
3875 Fahian Way
Palo Alto, California
Attn: Dr. Albert R. Giddis

Department of Aeronautical Engineering
University of Michigan
Ann Arbor, Michigan
Attn: Prof. Mahinder Uberoi

Gordon McKay Laboratory
Harvard University
Cambridge 39, Mass.
Attn: Dr. S. R. Seshadri

Commander
Air Research and Development Command
Attn: RDTR
Andrews Air Force Base
Washington 25, D. C.

College of Engineering
Dept. of Electrical Engineering
University of Florida
Gainesville, Florida
Attn: Dr. Sullivan

Dr. V. M. Papadopoulos
Dept. of Engineering
Brown University
Providence, R. I.

Major Vernon Lee Dawson
RSDD-CML(MO)
Redstone Arsenal
Huntsville, Alabama

Grumman Aircraft Engineering Corp.
South Oyster Bay Road
Bethpage, Long Island, N. Y.
Attn: Dr. Charles Mack

AF Office of Scientific Research
Washington 25, D. C.
Attn: Dr. Karl Kaplan

University of California
Radiation Laboratory
P. O. Box 808
Livermore, California
Attn: Dr. Bernard A. Lippmann

Department of Electrical Engineering
Case Institute of Technology
University Circle
Cleveland 6, Ohio
Attn: Professor Albert E. Collin

Antenna Laboratory
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts
Attn: Mr. Philip Blackstone

Lt. Mark J. Beran, ORRD
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts

Mr. Richard Mack, ORRD
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts

System Development Corporation
2500 Colorado Avenue
Santa Monica, California
Attn: Library